



Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

ENERGY-EFFICIENT EXTERNAL SOLAR CONTROL FOR PUBLIC BUILDINGS

Goncharova Natalia Ivanovna

Candidate of Engineering Sciences, Associate Professor, of the Department of Construction of Buildings and Structures Fergana State Technical University. Fergana, 86 Fergana str., Fergana 150107, Uzbekistan

E-mail: natalya.goncharova@fstu.uz

(ORCID 0000-0001-8846-4392)

Abstract

The possibilities of energy saving and creating an optimal microclimate in public buildings through the implementation of energy-efficient external shading systems have been studied. The use of inorganic porous basalt material is recommended as a material for external shading. The data presented in the article confirm the expediency of using basalt material when combining different functional solutions (insulation, sun protection) in the development of modern external shading projects for civil buildings.

Keywords: Energy efficiency, exterior sun control, advantages, basalt material, material qualities, thermal mass, types, modern sun protection systems

Introduction

The problems of energy conservation and creating an optimal microclimate in public buildings in the dry, hot climate of Uzbekistan can be solved by installing energy-efficient sun protection.

Currently, various sun protection devices are known in global and domestic practice, the purpose of which in building interiors is to reduce heat gain during the warm season (so-called passive cooling) and reduce heat loss during the cold season (passive solar heating) [1].

Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

When designing sun protection devices, it is necessary to take into account the orientation of buildings and their purpose.

In ancient times, in Central Asia and the Middle East, buildings were oriented in relation to the prevailing winds in the area so that rooms were constantly ventilated. Windows were covered with special grilles to prevent direct, hot sunlight from entering the rooms, but to allow reflected light to pass through, which did not heat the room [2]. These grilles were called 'panjara' (grate) (Fig. 1).

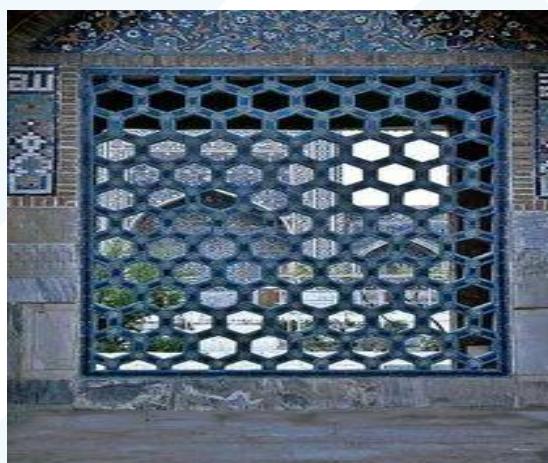


Fig. 1. Fragment of an external sunshade grate ('panjara')

Panjara was carved or cast from ganch. Ganch is obtained by burning stones containing gypsum and clay. Ganch is easy to work with and suitable for pouring into moulds of non-standard sizes and configurations.

Panjara was also made from wood. The lattice was assembled without nails or glue. All parts of the lattice are designed to fit into each other, forming a rigid patterned structure [2].

The practice of using modern sun protection in civil buildings recommends removable, adjustable devices for residential buildings and stationary devices for public buildings [3].



Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

The most common modern sun protection in residential buildings and public office buildings are curtains and blinds, which limit the amount of sunlight entering the premises but do not prevent the rooms from heating up [4].

The advantages of fixed external sun protection are that it improves the indoor climate by effectively controlling the temperature. Fixed sun protection affects the energy balance of buildings, reducing the need for air conditioning in summer and heating in winter. According to statistics, fixed sun protection reduces the need for air conditioning by 60-80% compared to internal sun protection, which provides savings of 20-30% [3]. This ensures the energy efficiency of buildings.

The positive impact of fixed sun protection on the lighting environment in rooms with computers and other screen devices has been noted, due to the reduction of discomfort from brightness, contrast and glare. External sun protection has a significant impact on the exterior of buildings [5].

Despite the obvious advantages of fixed sun protection, it is important to note the existing disadvantages associated with its design solutions (covering part of the light opening with sun protection), disadvantages associated with the sun protection's resistance to external factors such as atmospheric precipitation, ultraviolet radiation, wind loads, and reduced lighting in cloudy weather.

Technologies

The following materials are used for external stationary sun protection: decorative concrete, glass, dense acrylic or glass fabrics, composite materials (high-strength acrylic fabrics, porous inorganic and organic materials). Materials with low heat capacity are selected for sun protection devices to prevent the heat trap effect [6].

Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>



Fig. 2. Fragments of modern external sun protection

In our opinion, the most significant is the modern external sun protection from the manufacturer ALUTECH, which is a fabric canvas fixed in a guide rail and installed outside the building [8].

Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>



Fig. 3. Fragment of external sun protection manufactured by ALUTECH. ALUTECH offers installation of its structures depending on their design on existing buildings (surface-mounted or built-in installation) or concealed installation during building renovation. To achieve various architectural solutions in the exterior, an external box with 450 and 900 angles is provided.

Discussion of Results

When considering the choice of design and material for external sun protection, the choice of material with low heat capacity values is preferred in order to avoid the heat trap effect.

In the Republic of Uzbekistan, such a material with low heat capacity is volcanic basalt, from the melt of which high-quality, technologically advanced insulation with a fibrous structure is obtained. The material is environmentally friendly, non-combustible, chemically stable, durable, non-hygroscopic, and does not release harmful substances into the environment [8]. The material guarantees twelve times the impact, vibration and noise insulation.

Basalt owes its durability to silicon oxide, which is contained in the fibres of volcanic basalt.



Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

Inorganic porous materials containing silicon oxide have a unique porous network structure. They reflect and scatter UV rays, improving the photostability (light resistance) of the material, which ensures its durability.

The unique features of basalt include its high heat resistance, which makes it ideal for use in hot and extreme conditions, and the fact that it is non-combustible. Basalt also has excellent resistance to corrosion and chemical exposure, allowing it to be used in aggressive environments. The heat capacity (thermal conductivity) of basalt material (insulation) is 0.032–0.048 W/m·K [9]. This provides high thermal insulation properties due to the porous structure with numerous air pockets between the fibres.

Thermal conductivity depends on the type of product: mats — 0.046 W/m·K; lightweight slabs — 0.036 W/m·K; soft slabs — 0.036 W/m·K; semirigid slabs — 0.0326 W/m·K, rigid slabs — 0.043 W/m·K.

The heat capacity (thermal conductivity) of basalt is also influenced by: layer thickness (the thicker the layer, the higher the thermal conductivity); design features, manufacturing quality [10].

The heat capacity (thermal conductivity) of basalt is also influenced by: layer thickness (the thicker the layer, the higher the thermal conductivity); design features; and manufacturing quality [10].

The thermal conductivity of basalt material is regulated by standards, in particular GOST 9573-2012 (an interstate standard that establishes requirements for the thermal conductivity of mineral wool slabs with a synthetic binder).

Density and structure. The high density and fibrous structure of the material ensure strength and resistance to mechanical damage, such as compression or rupture.

The above-mentioned ability of basalt material to combine a variety of functional solutions (insulation, sun protection) is relevant for modern external sun protection projects.

Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

The types of basalt materials produced by well-known manufacturers and most compatible with the selected basalt material for external sun protection structures have been studied [11--16].



Fig. 4. General view of basalt materials produced

Below are galleries of basalt slabs of various thicknesses and colours, as well as basalt meshes (Figs. 2, 3).



Fig. 5. Gallery of basalt slabs of various thicknesses and colours

Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

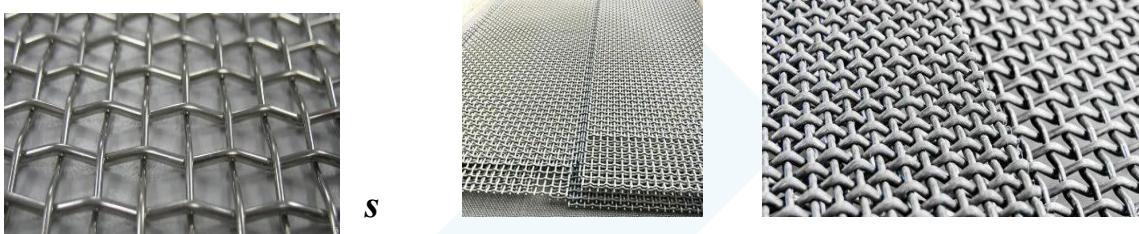


Fig. 6. Gallery of basalt meshes

Modern types of external sun protection for public buildings have also been studied [11-16]. A combined structure consisting of two or more systems of shading elements in different positions and dynamically adapted to changing conditions (Fig. 7) has been adopted as the basic (supporting) structure made of basalt material.



Fig. 7. Basic designs for external sun protection made from basalt fibre

The type of sun protection installation is determined by the functional purpose of the public building, allowing adjustments to be made to the sun protection design and influencing the exterior of the building.

Conclusion

The advantages described above of modern environmentally friendly volcanic basalt material, which has low heat capacity (thermal conductivity), high density and a fibrous structure, ensuring strength and resistance to mechanical damage.



Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

The ability of basalt material to combine a variety of functional solutions (insulation, sun protection) confirms its applicability in modern energy-efficient outdoor sun protection projects with sun protection structures that are dynamically adapted to changing conditions.

References

- [1] Dvoretsky, A.T. Energy efficiency of sun protection devices. Journal: Construction and Technogenic Safety. No. 31(82). 2023.
- [2]. Rempel L. Panjara. Architectural grilles and their construction. Tashkent. 1957.
- [3]. Dvoretsky A.T., Mitrofanova S.A., Klevets K.N. Sun protection as an element of passive low-energy architecture. /Journal 'Construction and Technogenic Safety.' Special issue, 2022. pp. 11-17.
- [4]. Chudina, E.V. Criteria for the effectiveness of sun protection devices / E.V. Chudina — Rostov-on-Don: IP Ivanov Vladislav Vyacheslavovich, 2017.- Pp. 42-44.
- [5]. GOST 33125-2014 — 'Sun protection devices. Technical specifications'
- [6]. Dvoretsky, A.T. The influence of the climate characteristics of the Russian Federation and the orientation of the building on the choice of the type of stationary sun protection device /A.T. Dvoretsky, A.V. Spiridonov, M.A. Morgunova // Biosphere compatibility: man, region, technologies. — 2016. Issue 4(16). — P. 50-57.
- [7]. Sergeychuk, O.V. Designing translucent enclosures for energy-efficient buildings / O.V. Sergeychuk — Kyiv: Kyiv National University of Construction and Architecture, 2013. — pp. 103–109.
- [8]. https://t.me/archi_ru/14541
- [9]. Jigiris D.D., Makhova M.F. Fundamentals of Basalt Fibre and Product Manufacturing — Moscow: Teploenergetik, 2002, 412 p.



Eureka Journal of Civil, Architecture and Urban Studies (EJCAUS)

ISSN 2760-4977 (Online) Volume 01, Issue 02, December 2025



This article/work is licensed under CC by 4.0 Attribution

<https://eurekaoa.com/index.php/8>

[10]. Basalt fibre materials. Collection of articles. / Edited by V.I. Kostikov, L.N. Smirnov. – Moscow: Informkonversiya, 2001. – 307 p.

[11]. Oknamedia.ru

[12]. Goncharova N.I. Energy-efficient lightweight building envelopes. SamDAKI Architecture and Construction Engineering Journal. Samarkand, 2021. 2-kism. No. 2.b.23-25.

[13]. Goncharova N.I., Mukhamedzyanov A.R. Global trends in the development of modern energy-efficient architecture. Samarkand. International scientific and practical conference on ‘Current issues in the development of sustainable architecture and urban planning and their innovative solutions.’ Book 2. – 2020. pp. 4–7.

[14]. Goncharova N.I., Mukhamedzyanov A.R. Energy saving in building envelope technology. International scientific and practical conference ‘Energy and resource saving technologies and equipment in the road and construction industries.’ Belgorod. 2020. pp. 107–112.

[15]. Goncharova N.I., Effectiveness of thermal protection of building envelopes. / International Scientific and Technical Conference. ‘The role of modern chemistry and innovation in the development of the national economy’ (27-29 May 2021). Fergana, 2021. pp. 109-110.

[16]. Goncharova N.I., Bioclimatic Approach in Energy-Efficient Architecture/ FarPI Ilmiy Tekhnik Journal. – Farona, 2022, special issue No. 4, pp. 49–52, (05.00.00; No. 20)